## DATA SHEET - 316SS

# FLUID TRANSFER AND FILTRATION TROLLEY



#### **Overview**

Pressure Dynamics' fluid transfer and filtration trolleys are safe, robust, compact, reliable and simple to use.

Standard fluid compatibility with:

- Water glycol
- Control fluids
- Mineral oils

This trolley offers high performance and resistance to corrosion.


## **Build Specification**

polypropylene  Pressure 6.9 Bar (100PSI)  Air Supply Compressed air <150PSI  Gross Weight 60kg  Dimensions H: 1000mm  W: 700mm  D: 600mm  Flow Rate @1.5Bar head, 70LPM  *viscosity @4.0Bar head, 43LPM @5.0Bar head, 30LPM Trolley 15/16" JIC or 1" Camlock	Pump	Pneumatic diaphragm pump,
Air Supply Compressed air <150PSI  Gross Weight 60kg  Dimensions H: 1000mm W: 700mm  D: 600mm  Flow Rate  *viscosity dependent Trolley Compressed air <150PSI  60kg  H: 1000mm  W: 700mm  0: 600mm  4.0Bar head, 70LPM  *5.0Bar head, 30LPM  15/16" JIC or 1" Camlock		polypropylene
Gross Weight 60kg  Dimensions H: 1000mm  W: 700mm  D: 600mm  Flow Rate @1.5Bar head, 70LPM  *viscosity @4.0Bar head, 43LPM dependent @5.0Bar head, 30LPM Trolley 15/16" JIC or 1" Camlock	Pressure	6.9 Bar (100PSI)
Dimensions  H: 1000mm  W: 700mm  D: 600mm  Flow Rate  @1.5Bar head, 70LPM  *viscosity @4.0Bar head, 43LPM dependent @5.0Bar head, 30LPM Trolley  15/16" JIC or 1" Camlock	Air Supply	Compressed air <150PSI
W: 700mm  D: 600mm  Flow Rate @1.5Bar head, 70LPM  *viscosity @4.0Bar head, 43LPM dependent @5.0Bar head, 30LPM Trolley 15/16" JIC or 1" Camlock	Gross Weight	60kg
D: 600mm  Flow Rate @1.5Bar head, 70LPM  *viscosity @4.0Bar head, 43LPM dependent @5.0Bar head, 30LPM Trolley 15/16" JIC or 1" Camlock	Dimensions	H: 1000mm
Flow Rate @1.5Bar head, 70LPM  *viscosity @4.0Bar head, 43LPM dependent @5.0Bar head, 30LPM Trolley 15/16" JIC or 1" Camlock		W: 700mm
*viscosity @4.0Bar head, 43LPM dependent @5.0Bar head, 30LPM Trolley 15/16" JIC or 1" Camlock		D: 600mm
dependent@5.0Bar head, 30LPMTrolley15/16" JIC or 1" Camlock	Flow Rate	@1.5Bar head, 70LPM
ConnectionsstandardTank15/16" JIC or 2" CamlockConnectionsstandard	dependent Trolley Connections Tank	@5.0Bar head, 30LPM 15/16" JIC or 1" Camlock standard 15/16" JIC or 2" Camlock
Air Interface Minsup Type A	Air Interface	Minsup Type A



## **Equipment Details**

<b>Construction Material</b>	316 Stainless steel- frame,
	fasteners, dust caps/tethers Compatible elastomeric seals.
Tubing	316SS tubing/fittings
Hoses	Custom length 316SS trim, suction and delivery hoses, tested, tagged with serial numbers, 316SS caps and tethers
Filter	20" 316SS Housing, 3-Micron
Flow Control	Control and isolation via
	robust regulator/filter with vented 316SS isolation valve, 316SS liquid filled gauge
Wheels	Low maintenance urethane,
	on nylon wheels self- lubricating bearings

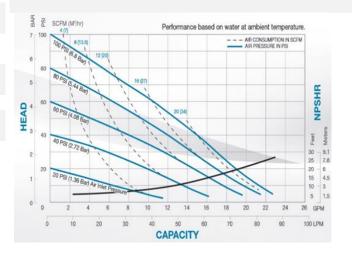







# **ABOUT PRESSURE DYNAMICS**



Pressure Dynamics is an engineering and services contractor specialising in hydraulic and lifting solutions.

Our team of highly skilled project managers, engineers and technicians are committed to collaborating with our clients in providing innovative, quality-assured services and products that deliver superior function, reliability and safety.

When we deliver, we focus on:



#### RELIABILITY

Optimising equipment and system performance - to maximise your ROI.



#### **PRODUCTIVITY**

Maximising operational reliability of assets and equipment safely and cost-effectively.



#### **INNOVATIVE** SOLUTIONS

Developing creative, fit-for-purpose solutions to meet our client's true needs and objectives.



#### RISK **MANAGEMENT**

Delivering and maintaining quality, cost-effective and safe equipment and assets while mitigating risk.



# SUSTAINABILITY

Delivering skill, knowledge and understanding through our documentation, user-intuitive products and training services.

### Market sectors we operate in:



Oil & Gas



Mining



Marine



Defence



Infrastructure



Power & Utilities

#### Our location network

